



BB-2 Random Industrial Case Taper - Tape Width 2"

The BB-2/R case taper is a cost-effective top and bottom random case taper designed for large run case sealing random sized cases.

BB-2/R utilizes pressure-sensitive tape and features self-centering side rails, a rugged bottom belt drive, and heavy-duty mast that easily adjusts to handle a variety of case sizes.




BB-2/R Taping Specifications

Sealer Type	Bottom belt, top and bottom random case sealer
Machinery Makeup	Industrial strength 10 gauge steel, powder coated for durability
Belt Speed	60 feet/per minute
Tape Speed	30 cases/per minute, depending on box size and operator efficiency
Conveyor Height Adjustment	22.25" to 34.25"



Box Specifications

Minimum Box Size	5.0"	4.0"	4.0"
Maximum Box Size	Infinite	20.0"	21.0"
Tape Size	2" wide pressure sensitive tape, up to diameter rolls, optional 3" wide tape		
15"	Proven design requires no lubrication, removable for maintenance and interchangeable with top or bottom cartridges		
Tape Cartridge	110 VAC, 60Hz, 4.0A		
Electrical Requirements	60 PSI		
Air Requirements			

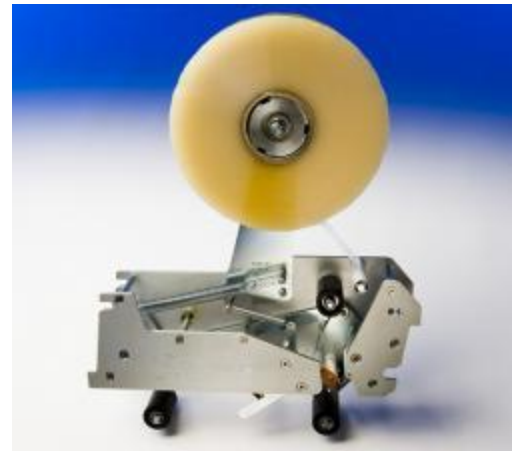

BB-2/R Optional Accessories

3" Tape Head	Accepts 3" wide tape rolls
Casters	Rugged wheels for transportation within plant
Front Packing Table	Solid table bolts before taping system to allow for case packing