
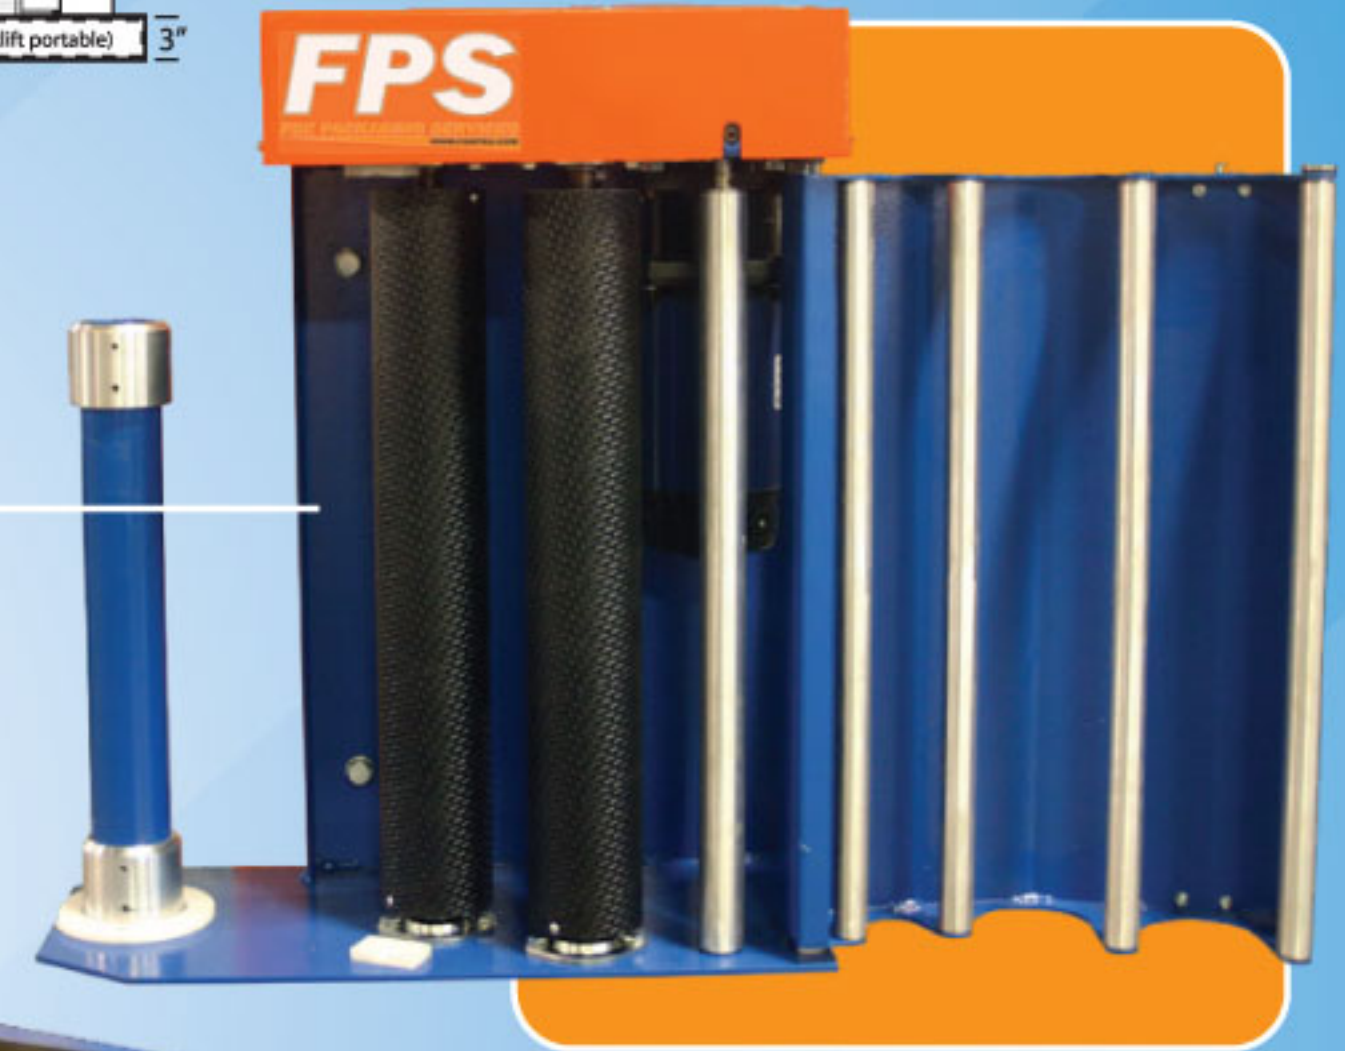


FPS 400L

HURRICANE THREAD® PRESTRETCH CARRIAGE

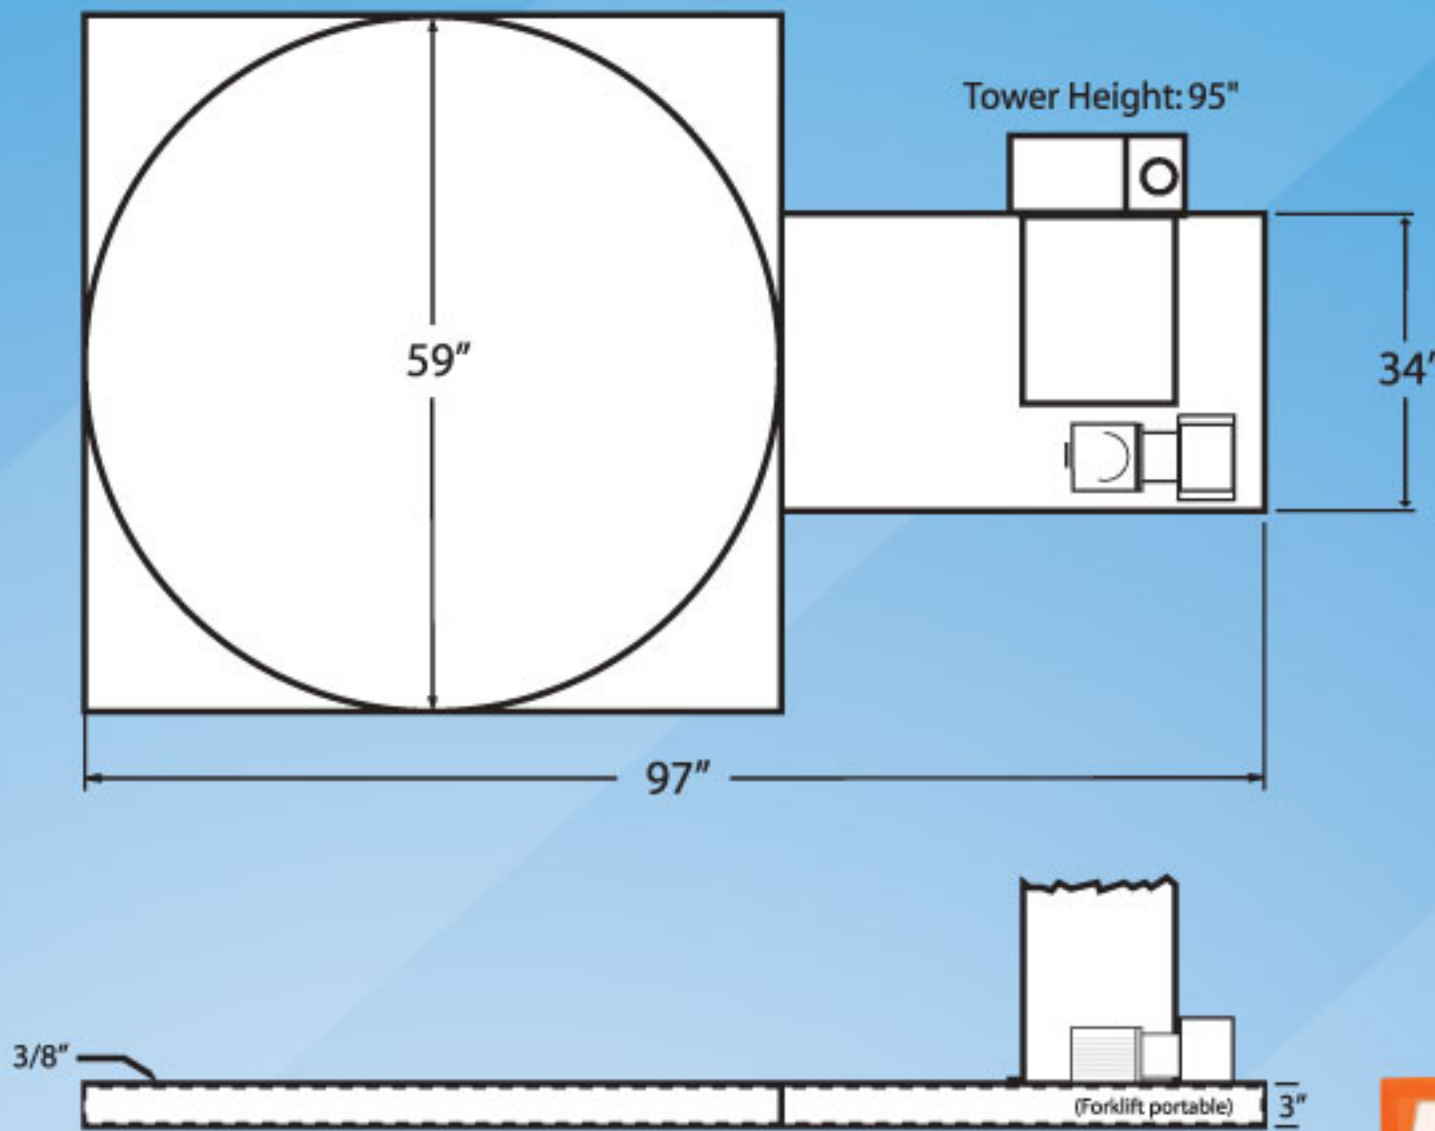

POWER DE-ENERGIZED
WHEN CARRIAGE DOOR OPEN

SPECIFICATIONS:

CONTROLS	PLC TOUCH SCREEN CONTROLS
PRODUCTION SPEED	1-40 LPH*
LOAD SIZE	55"L x 55"W x 91"H (80" Diagonal)
WEIGHT CAPACITY	5000LBS
STRUCTURAL	WELDED STEEL CONSTRUCTION
TURNTABLE DRIVE	1/2HP SCR DRIVE, 20:1 GEARBOX 40 TABLE SUPPORT WHEELS
TURNTABLE SPEED	0-15RPM
CARRIAGE DRIVE	1/2HP SCR DRIVE, #50 ANSI CHAIN
FILM DELIVERY	HURRICANE THREAD® PRESTRETCH CARRIAGE 200% FACTORY SET PRESTRETCH 50-250% STRETCH AVAILABLE ON REQUEST
FILM ROLL	20" MACHINE FILM, 3" CORE
POWER REQ.	115VAC, 15A, 60Hz- PLUG AND PLAY

SAFETY	SAFEGUARD FULLY GUARDED TOWER & MOVING PARTS NO PINCH: CARRIAGE DE-ENERGIZED WHEN DOOR OPEN EMERGENCY STOP BUTTON
ONBOARD PROGRAMS	STANDARD WRAP CYCLE STANDARD W/TOP COVER PAUSE BOTTOM WRAPS FIRST WRAP UPWARDS ONLY
OPTIONS	HEIGHT/BASE EXTENSION LOADING RAMP HEAVY DUTY EXTENDED RAMP (For powered hand trucks) INTEGRATED SCALE PACKAGE DUAL TURNTABLE (400LDT)